


AS4, 6 & 10

SPRING RETURN NEMA 4 & 7

SPECIFICATIONS:

Torque AS4 400 Lb-In, AS6 600 Lb-In, AS10 1000 Lb-In
 Cycle time 12 seconds/90° 115 or 230Vac
 Duty Cycle 25% standard 115Vac or 230Vac
 Motor Permanent split capacitor
 115Vac/1ph/50-60Hz standard
 With thermal over load protection
 L. R. Current 115Vac = 2.91 amps
 230Vac = 2.40 amps
 Enclosure NEMA Type 4 standard, Type 7 optional
 Coating Thermally bonded polyester powder
 Fasteners 300 series stainless steel
 Output AS4 & AS6 ISO 5211 F07 = 0.66 Male
 AS10 = 1.0" Male
 Mounting Pad ISO 5211 F07
 Brake Power on, standard
 Weight AS4 & AS6 = 67 Lbs., AS10 = 76 Lbs.
 Lubrication Permanent
 Installation Universal
 Temp. Range -40°F. to 150°F.
 Heater & thermostat required 0°F. & below
 Switches SPDT snap action
 16 amp ½ HP 125, 250Vac, 0.5amp 125Vdc

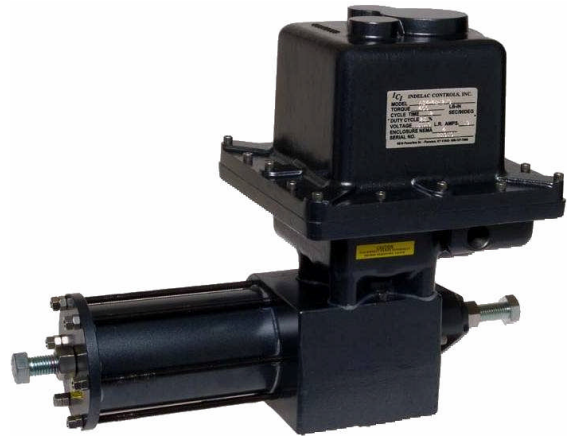

ICI's models AS4, AS6 & AS10 electric spring return actuators are heavy duty actuators designed for fail-safe applications. They are recommended for applications requiring system protection from unforeseen power failures. These actuators are recommended for applications requiring approximately 25 open/close cycles per day.

