

# S SERIES NEMA 4 DEEP BASE

## SPECIFICATIONS:

Torque	200 Lb-In & 300 Lb-In
Cycle time	5 seconds/90° 115Vac & 230Vac 10 seconds/90° with 75% duty cycle 9.0 seconds/90° 12Vdc, 24Vdc & 24Vac
Duty Cycle	25% standard 115Vac & 230Vac 75% optional 75% 12Vdc, 24Vdc & 24Vac
Motor	Permanent split capacitor 115Vac/1ph/50-60Hz standard With thermal over load protection
L. R. Current	200 Lb-In 0.75 amps 115Vac 300 Lb-In 0.99 amps 115Vac 0.38 amps 230Vac 4.2 amps 12Vdc, 2.6 amps 24Vdc
Enclosure	NEMA 4 standard
Coating	Thermally bonded polyester powder
Fasteners	Captive, 300 series stainless steel
Output	ISO 5211 F05 300 series stainless steel
Mounting Pad	ISO 5211 F03, F05 & F07
Over Ride	Not available
Brake	Friction, standard
Position Ind.	Visual indicator Wired for light indication
Weight	8 Lbs.


Lubrication	Permanent
Installation	Universal
Temp. Range	-40°F. to 150°F. Heater & thermostat required 0°F. & below
Switches	SPDT snap action 16 amp ½ HP 125, 250Vac, 0.5amp 125Vdc

NOTE: 24Vac motors are 24Vdc motors rectified for use with 24Vac voltage.



Select this enclosure for S series with Timers, Modulating Control (4-20mA, 0-10Vdc, etc.) or Speed Control

Model SR4BF05-5

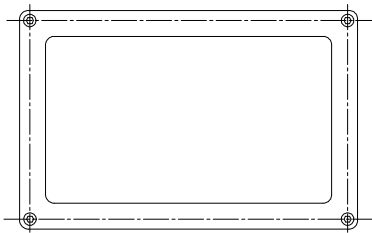

ALLOW 3" FOR COVER REMOVAL

