


INDELAC

CONTROLS, INC.

ELECTRIC ACTUATORS AND CONTROLS

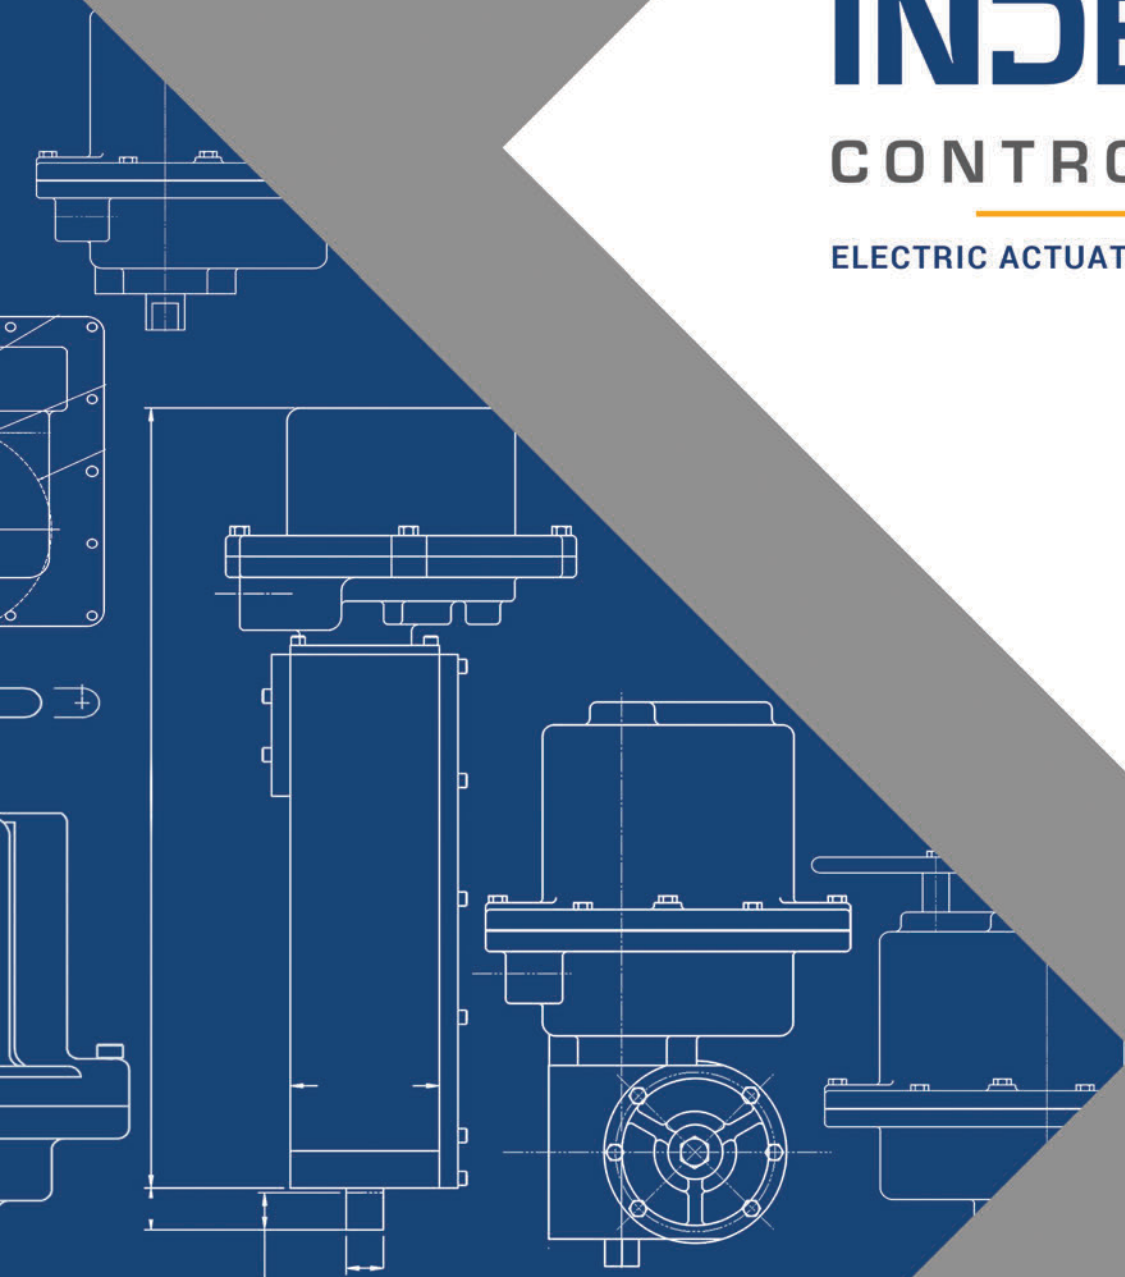


INDELAC

CONTROLS, INC.

OUR COMPANY

At Indelac Controls, Inc. we design, develop and manufacturer high-quality electric actuators. We utilize state-of-the-art equipment and industrial craftsmanship in our full machine shop located in Florence, KY. Our electric actuators are designed to withstand extreme conditions, maintain long-term product reliability, and consistently out-perform the competition. We are a value-driven company that sells reliable products worldwide that are proudly made in the USA.

 **WE MAKE
THE MOST
RUGGED
COMPACT ELECTRIC
ACTUATORS
IN THE INDUSTRY**

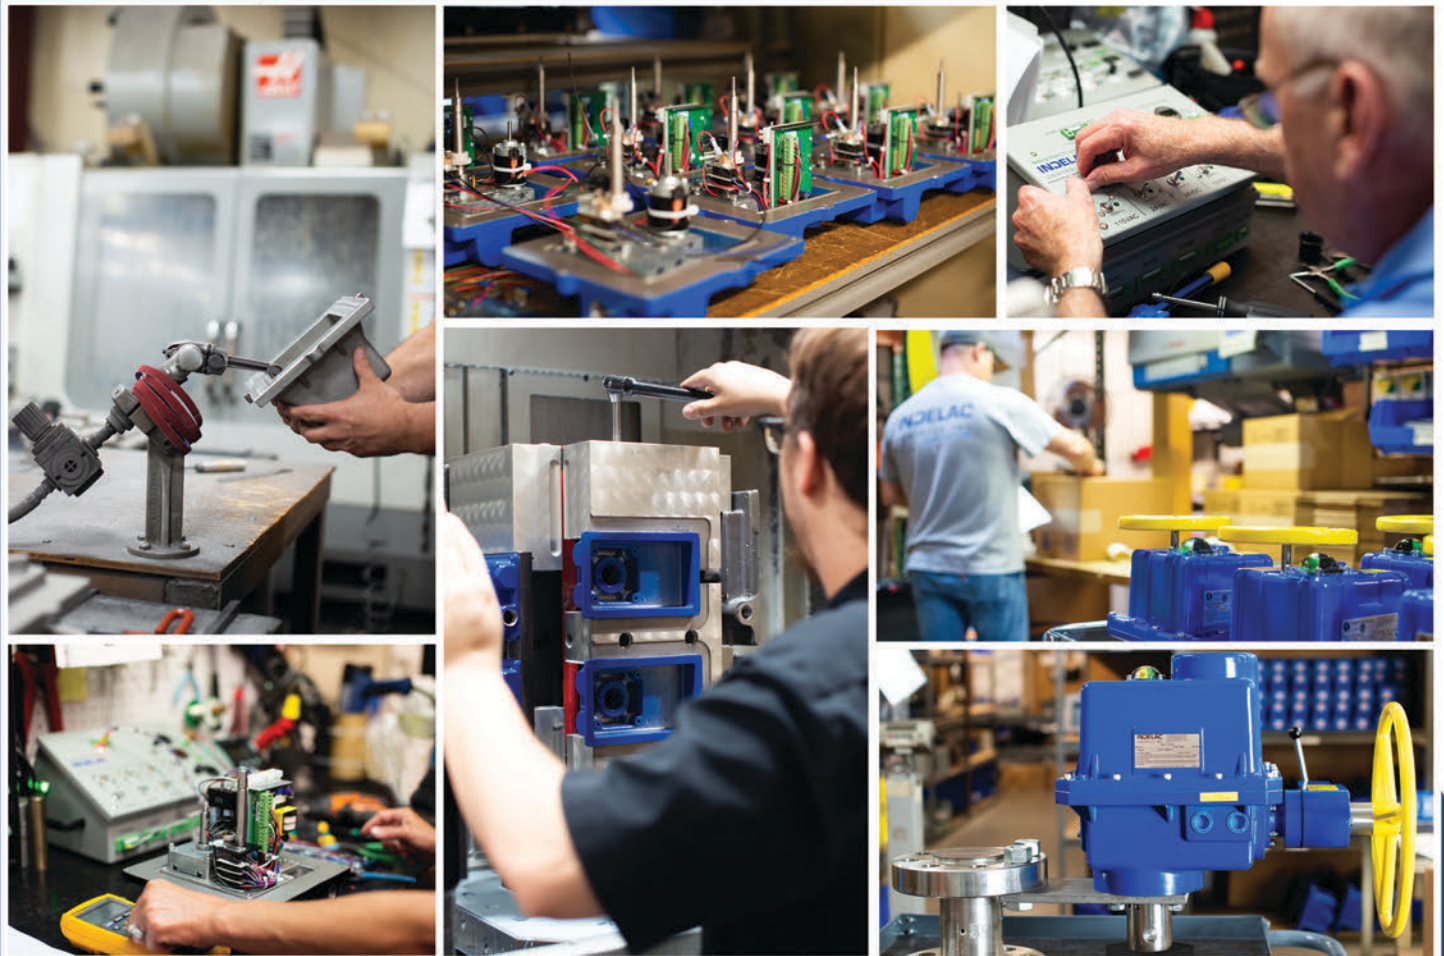


MANUFACTURING INDUSTRIAL GRADE ACTUATORS AND CONTROLS SINCE 1986

INDUSTRIES WE SERVE

We have established ourselves as the leading manufacturer and supplier of rugged electric actuators and controls. Our employees are capable of serving a diverse range of industries by using learned skills and abilities to design unique projects tailored to our clients. With our experienced engineers, production and sales team we are able to problem solve and provide on-site training.

Our versatile products have been used in thousands of applications across a broad spectrum of industries. We offer a wide array of quarter-turn, multi-turn and fail-safe electric actuators. Our products are capable of providing automation solutions for both commercial and industrial flow control applications.

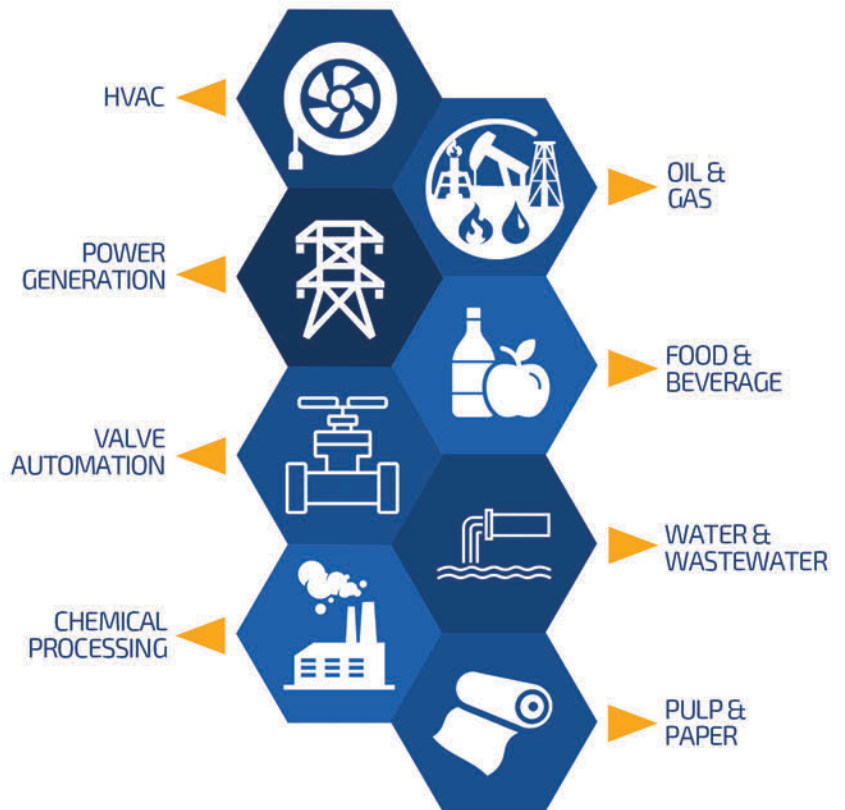

OUR PRODUCTS

ELECTRIC ACTUATORS - FAILS SAFE DEVICES - CONTROL PANELS

INDELAC
CONTROLS, INC.

- ENCLOSURES: NEMA 4/4x or NEMA 4/4x/7&9
- TEMPERATURE RANGE: -40° F TO 150° F
- HEATER & THERMOSTAT REQUIRED FOR 0° F & BELOW

R-SERIES



TORQUE: 100 lb-in,
11.3 Nm
VOLTAGE: 115Vac, 230Vac/1Ph,
24Vac, 24Vdc, 12Vdc

S-SERIES



TORQUE: 200 & 300 lb-in,
22.6 & 33.9 Nm
VOLTAGE: 115Vac, 230Vac/1Ph,
24Vac, 24Vdc, 12Vdc

M-SERIES



TORQUE: 400 - 1,500 lb-in,
45.2 - 169.5 Nm
VOLTAGE: 115Vac, 230Vac/1Ph,
24Vac, 24Vdc, 12Vdc

L-SERIES



TORQUE: 700 - 3,840 lb-in,
79 - 433.9 Nm
VOLTAGE: 115Vac, 230Vac/1Ph,
24Vac, 24Vdc, 12Vdc,
230Vac/3Ph, 460Vac/3Ph

K-SERIES



TORQUE: 5,000 - 27,300 lb-in,
565 - 3,084 Nm
VOLTAGE: 115Vac, 230Vac/1Ph,
24Vac, 24Vdc, 12Vdc,
230Vac/3Ph, 460Vac/3Ph

SNS-SERIES



TORQUE: 400 - 2,800 lb-in,
45.2 - 317 Nm
VOLTAGE: 115Vac, 230Vac/1Ph,
24Vac, 24Vdc, 12Vdc

SPRING RETURNS



TORQUE: 200 - 1,200 lb-in,
22.6 - 135.6 Nm
VOLTAGE: 115Vac, 230Vac/1Ph,
24Vac, 24Vdc, 12Vdc

FAIL-SAFE DEVICE



AMPS: 3, 5, 7, 10, 15 & 30
VOLTAGE: 115Vac, 230Vac, 24Vdc



CONTROL PANELS



ENCLOSURES: Aluminum, Carbon
Steel, Stainless Steel or Polycarbonate.




TYPE OF CONTROL: Open/Close,
Remote/Off/Local, or Throttling.

STANDARD FEATURES

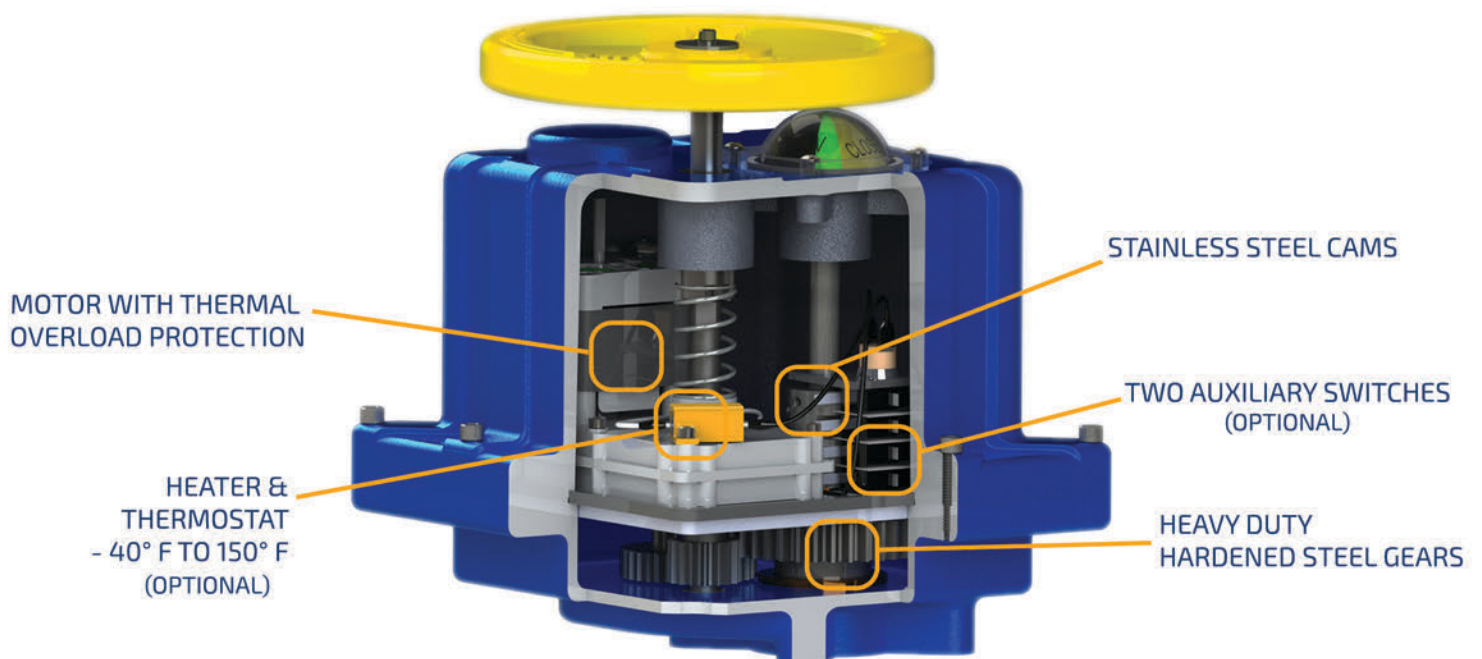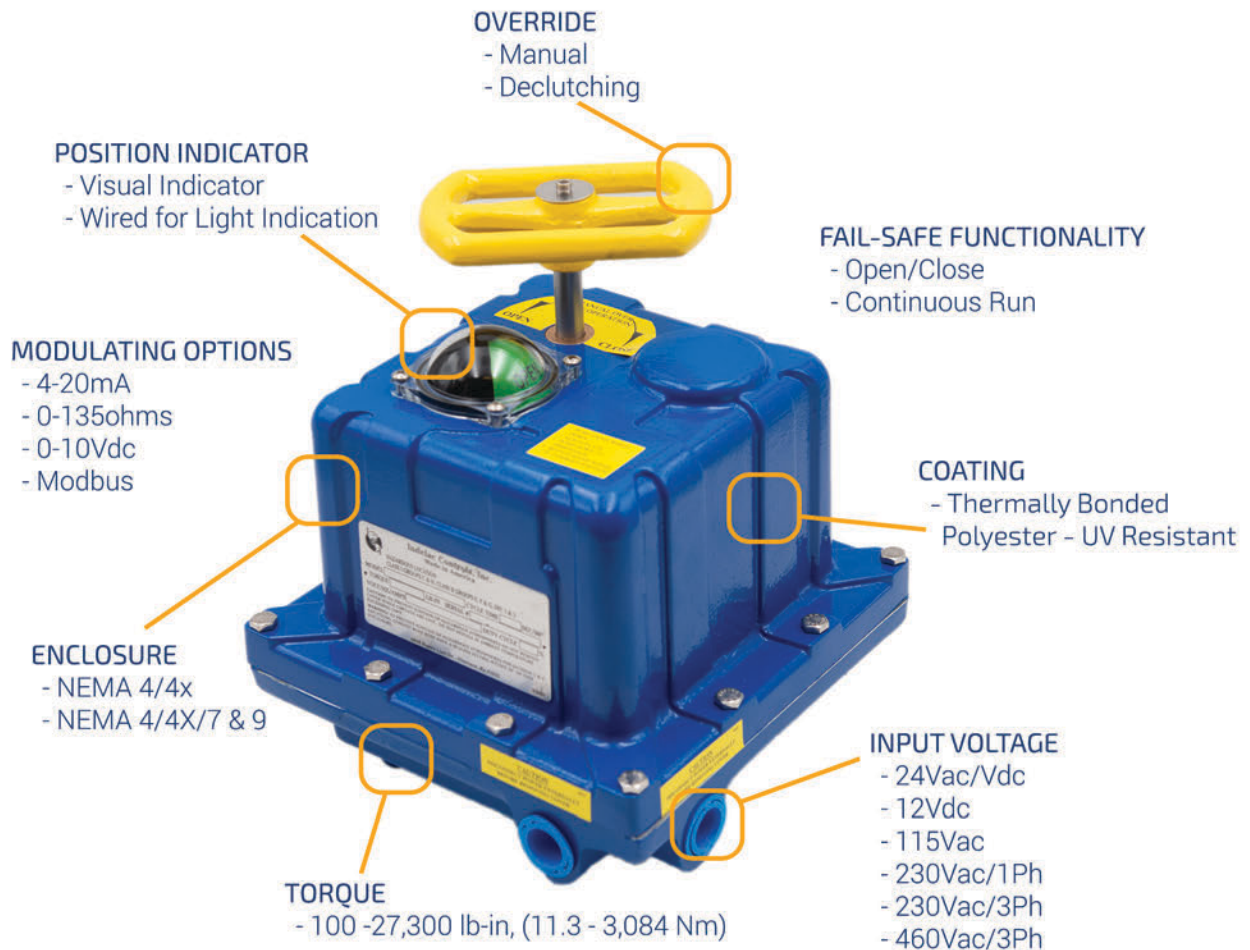

INDELAC

CONTROLS, INC.

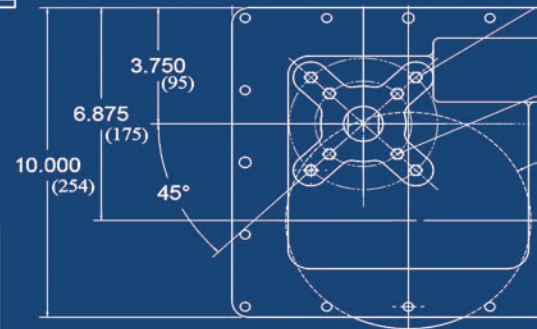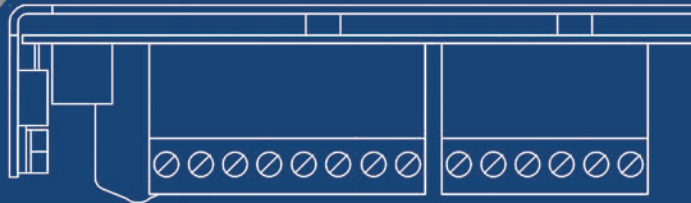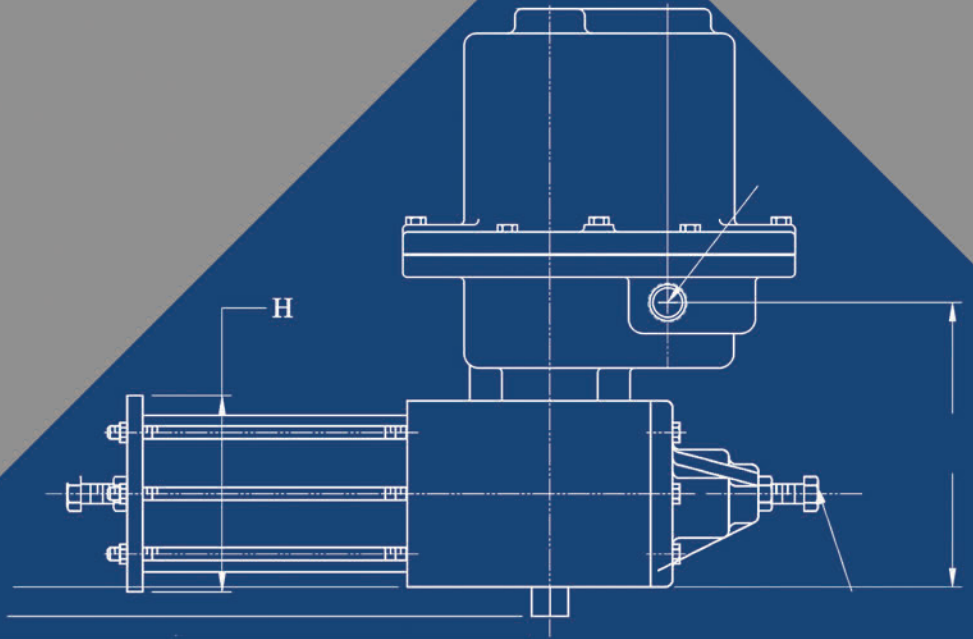

CONTACT US

☎ 859-727-7890

☎ 800-662-9424

☎ 859-727-4070

🌐 WWW.INDELAC.COM

✉ SALES@INDELAC.COM