



NOTE:
USE AWG #14 WIRE MIN.

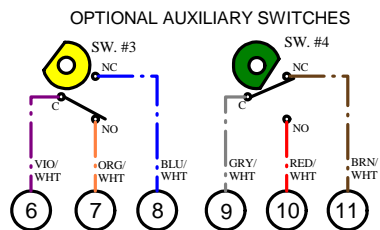

REV.	DESCRIPTION	DATE	BY
1	CHANGED DWG. #: WAS 011014	23SEP14	WJR
2	ADDED LIGHT INDICATION, WIRE COLORS & REDRAWN W/CHGS	26JUL16	WJR

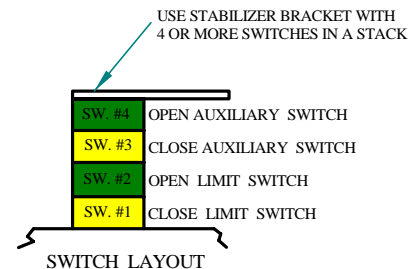

OPERATION:
POWER TO 1 & 2 TO OPEN (CCW)
POWER TO 1 & 3 TO CLOSE (CW)
TERMINALS 4 & 5 ARE FOR LIGHT INDICATION.
TERMINALS 6 THRU 11 FOR OPTIONAL AUXILIARY SWITCHES.
TERMINAL 12 IS FOR THE OPTIONAL HEATER.

RELAY #: 7-1608065-1
Tyco - 20A, 24vac

SPDT SWITCH
SHOWN FOR
ILLUSTRATION
ONLY

NEU HOT

24VAC
POWER SUPPLY

<i>I C I</i>	Indelac Controls, Inc. Florence, Ky. 41042		
	WIRING DIAGRAM, 24VAC "L" SERIES ACTUATOR WITH OPTIONAL 2 AUXILIARY SWITCHES, BRAKE & HEATER /THERMOSTAT		
OLD DWG. #: WD24VACChamp-2S	10-14-03	JLR	W031014